

# PowerWAVE 9000DPA (30-250 KVA)



Designed to meet the requirements of today – and tomorrow.

---

#### Key benefits

---

Individual static switches per module

---

Each module has its own display and controller

---

Each module has its own control logic

---

Separate or common battery configuration

---

---

#### PowerWAVE 9000DPA

---

---

Up to 250 kVA (200 kVA N+1) in a single frame

---

Parallelable up to 1.5 MVA

---

Transformerless technology

---

96% true online efficiency

---

Near unity power factor at parallel and full loads (0.99% @ 100% load)

---

Low input harmonic distortion (THDi<3%)

---

Fully rated output power (blade friendly)

---

Online double conversion technology

---

Low total cost of ownership

---


Delivers class-leading 'six nines' (99.9999%) power availability.

---

A revolutionary rack-mounted uninterruptible power supply designed with 'hot swap' modules for future scalability. A transformerless UPS system with class-leading 'six nines' (99.9999%) power availability for demanding IT environments and data centres.



In today's 'on demand' world, highly reliable power protection systems are essential to the protection of critical data and to ensure 24/7 availability for business applications.

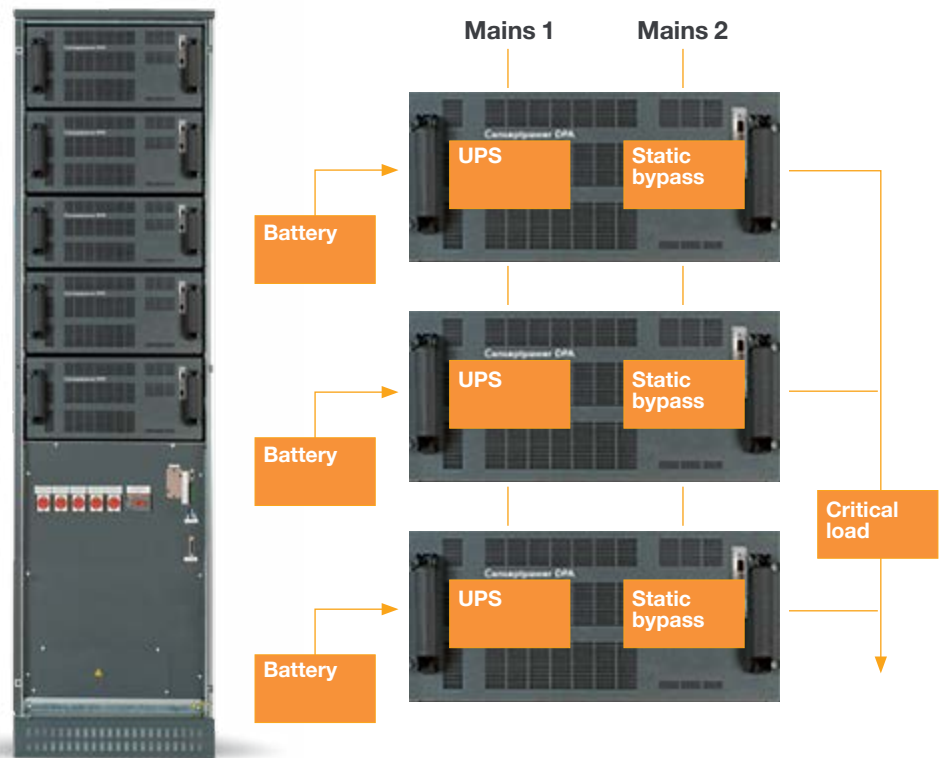

### Advanced decentralised parallel architecture (DPA)

- Distributed control and power
- Independent hot-swap modules
- No single points of failure

Decentralised parallel architecture (DPA) means each UPS module contains all the hardware and software required for full system operation. They share no common components, so a DPA parallel system offers extremely high availability. In addition, potential single points of failure are eliminated and system uptime is maximised. PowerWAVE 9000DPA UPS modules can be paralleled to provide redundancy (parallel redundancy) or to increase the system's total capacity.

### Easy to replace 'hot-swap' modules

- Replace or add modules with no downtime/no risk
- Simple power upgrade

True 'hot-swap' modularity enables the safe removal and/or insertion of UPS modules into a PowerWAVE 9000DPA system without risk to the critical load and without the need to either transfer the critical load onto raw mains or remove power from the critical load. This directly addresses today's requirement for continuous uptime, reducing mean time to repair (MTTR).

### Future proof installation

- Investment protection

Future proof installation is assured with the PowerWAVE 9000DPA's scalability and ability to supply the most demanding of modern loads.

---

## Smallest footprint saves space

---

Extremely high power density

---

Uses less valuable floor space

---

Class-leading power density of 342kW/m<sup>2</sup> significantly minimises the floor space required to accommodate the PowerWAVE 9000DPA. This is particularly important in data centres where space must be maximised to accommodate revenue-earning equipment.

---

## Maximum availability

---

Six nines availability 99.9999%

---

PowerWAVE 9000DPA maximises availability by combining the benefits of decentralised parallel architecture, parallel redundancy and 'hot-swap' modularity with low MTTR.



---

## High reliability

---

Reliability maximised

---

Automatic parallel redundant operation

---

Parallel redundant (N+1) UPS systems provide the highest level of reliability by ensuring that the number of UPS modules in the system is a minimum of one over and above the number required (N) to fully support the critical load. The PowerWAVE 9000DPA is designed to automatically operate as a parallel redundant system, ensuring that the critical load always receives the highest possible level of power protection.

---

## Low cost of ownership

---

High operating efficiency, regardless of loading

---

Reduced installation and upgrading costs

---

Near unity input power factor and low input THDi

---

By delivering energy efficiency, scalable flexibility and ergonomic design, the PowerWAVE 9000DPA offers a low total cost of ownership and easy serviceability.

---

## Blade friendly

---


Supports blade servers

---

Supports leading power factors

---

Blade servers typically have a leading power factor, which can present problems to UPS systems, particularly if they are not designed to power such loads. The PowerWAVE 9000DPA is designed to power all types of electrical loads, including blade servers. It can provide fully rated output power to power factors in the range of 0.9 leading to 0.8 lagging.

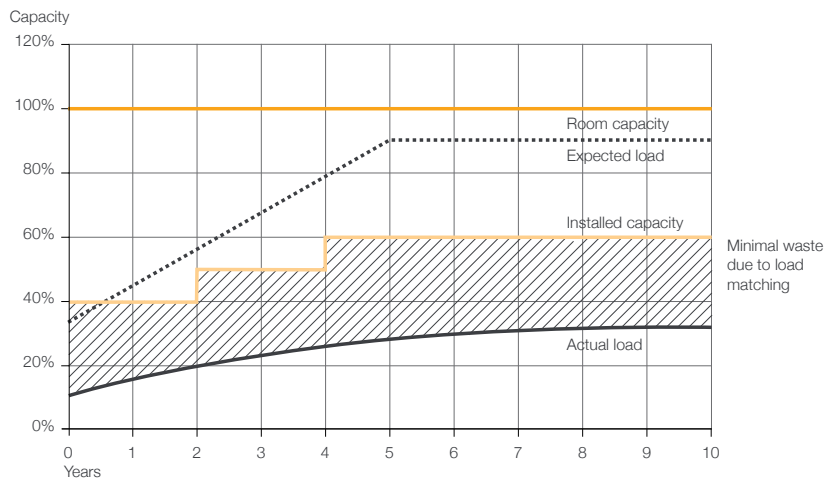

## Right sizing

Cost-effective scalability


Ability to 'right size' the system over time

Simple installation of new modules

UPS modules can be added in cost-effective incremental steps as the critical load power requirement grows. This 'right sizing' reduces initial cost, optimises operating efficiency and helps reduce total cost of ownership.


Up to five UPS modules can be paralleled in a single rack-format cabinet to enable up to 200kW (342kW/m<sup>2</sup>) of power capacity per cabinet, providing 'vertical scalability'. If more capacity is required, cabinets can be paralleled providing 'horizontal scalability'.

#### AC- AC Efficiency

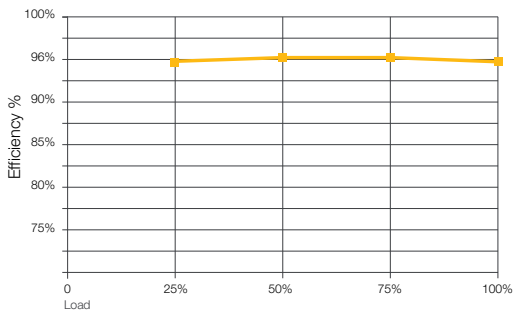


The PowerWAVE 9000DPA's 96% true online efficiency, significantly reduces system running costs and site air-conditioning costs. This helps reduce the organisation's carbon footprint.

#### Input power factor

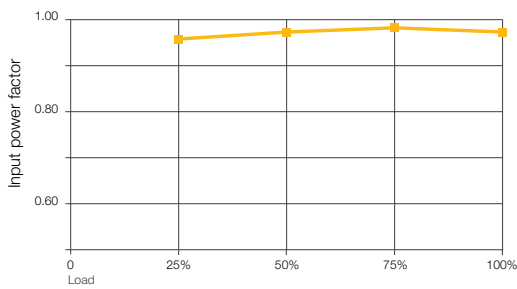


Near unity input power factor, at partial and full load, reduces the required size of the input cable and fuses, thereby reducing the materials (and costs) associated with the system's electrical installation.

#### THDi

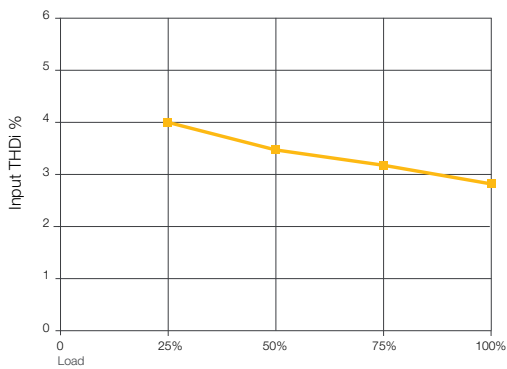

Input current total harmonic distortion (THDi) of <3% virtually eliminates harmonic pollution of the mains supply.

#### Leading/Lagging

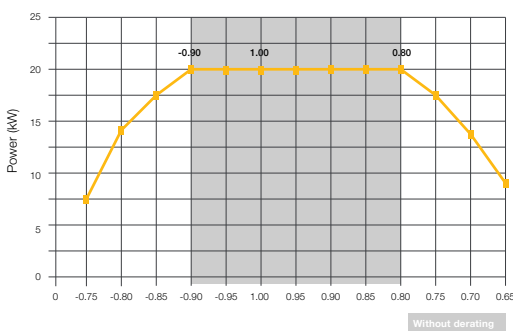

Fully rated output power in the range of 0.9 leading and 0.8 lagging



---

**Uninterruptible Power  
Supplies Ltd,**  
Woodgate,  
Bartley Wood Business Park,  
Hook, Hampshire RG27 9XA

---

**Tel:** 01256 386700

---

**Fax:** 01256 386701

---

**Email:** [sales@upspower.co.uk](mailto:sales@upspower.co.uk)

---